


② screw (M1.4×2.5)

The claw which is hooked on the guide rail.

③ Gooseneck Retainer

② screw (M1.4×2.5)

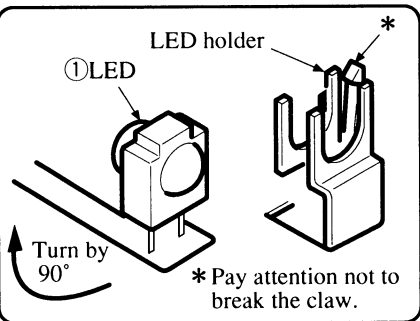

④ stop washer

⑤ Gooseneck Gear Assy

Tension Regulator Band

